



DSS

ICAR - Indian Institute of Soil and Water Conservation,
Research Center, Sector 27A, Chandigarh – 160 019

Pankaj Panwar, O.P.S. Khola, Sharmistha Pal, S.S. Shrimali and S.K. Sharma




Spur Estimates

a) In front of super structure				-		Sqm		
b) Under and sides of super structure				-		Sqm		
Total (a+b)							Sqm	
2. Earth work in excavation by mechanical means (Hydraulic excavator) / manual means in foundation trenches or drains (not exceeding 1.5 m in width or 10 sqm on plan), including dressing of sides and ramming of bottoms, lift upto 1.5 m, including getting out the excavated soil and disposal of surplus excavated soil as directed, within a lead of 50 m. All kinds of soil.						cum		
3. GI wire netting including wire knitting with 10 SWG Hot dip GI wire with grid size 15 x 15 cm						Sqm		
a) Top & Bottom				-		Sqm		
b) Front & Back				-		Sqm		
c) Left & Right side				-		Sqm		
Total (a+b+c)							Sqm	
4. Collection of stones rough hammer dressing (more than 15 cm stone boulders) including transportation etc. complete						cum		
5. Hand packing of stones and packing in GI wire cage etc complete						cum		
6. Cost of GI wire 10 SWG @ 1.28 kg/sqm						kg		
Total cost								

Summary Statement				
Items	Quantity	Unit	Rates	Amount
Surface dressing		Sqm		
Earth Work		cum		
GI wire netting		Sqm		

Collection of stones		cum		
Hand packing of stone		cum		
Weight of GI wire		kg		
Total Amount, Rs				

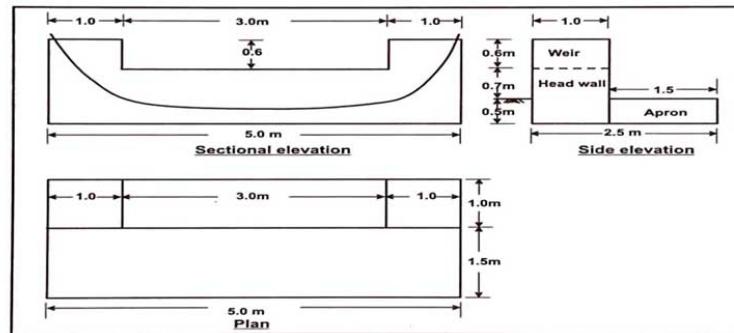

Note: Rates are as per CPWD, DSR 2021 and prevailing Market Rate